



HDA UNDERCUT ANCHOR

Technical Datasheet



Update: Sep-20





















HDA Undercut anchor

Ultimate-performance undercut anchor for dynamic loads

| Anchor version | Benefits |
|---|--|
|  <p>HDA-P HDA-PR HDA-PF Anchor for pre-setting (M10-M20)</p> | <ul style="list-style-type: none"> - Safe and high performance structural seismic design with ETA C1 and C2 - Mechanical interlock (undercut) - Low expansion force (thus small edge distance / spacing) - Self undercutting (without special undercutting tool) - Performance of a headed stud - Complete system (anchor, stop drill bit, setting tool, drill hammer) - Setting mark on anchor for control (easy and safe) - Completely removable |
|  <p>HDA-T HDA-TR HDA-TF Anchor for through-fastening (M10-M20)</p> | |

| Base material | Load conditions |
|--|--|
|  <p>Concrete (non-cracked)</p>  <p>Concrete (cracked)</p> |  <p>Static/ quasi-static</p>  <p>Seismic ETA-C1, C2</p>  <p>Fatigue</p>  <p>Shock</p>  <p>Fire resistance</p> |
| Installation conditions | Other information |
|  <p>Hammer drilled holes</p>  <p>Small edge distance and spacing</p>  <p>Performance of a headed stud</p> |  <p>Tracefast</p>  <p>European Technical Assessment</p>  <p>CE conformity</p>  <p>PROFIS design Software</p>  <p>Nuclear power plant approval</p>  <p>A4 316 Corrosion resistance</p> |

Approvals / certificates

| Description | Authority / Laboratory | No. / date of issue |
|--|---|--------------------------|
| European Technical Assessment ^{a)} | CSTB, Paris | ETA-99/0009 / 2015-01-06 |
| European Technical Assessment ^{a)} | DIBt, Berlin | ETA-18/0974 / 2019-06-20 |
| ICC-ES report incl. seismic ^{b)} | ICC evaluation service | ESR 1546 / 2014-02-01 |
| Shockproof fastenings in civil defence installations | Federal Office for Civil Protection, Bern | BZS D 09-601/ 2009-10-21 |
| Nuclear power plants | DIBt, Berlin | Z-21.1-1987 / 2014-07-22 |
| Fire assessment report | Warringtonfire | WF 327804/A 2016-05-3 |

a) All data given in this section according to ETA-99/0009, issue 2015-01-06, and ETA-18/0974, issue 2019-06-20.

b) For more details on Technical Data according to ICC please consult the relevant HNA FTM.



Static and quasi-static resistance (for a single anchor)

All data in this section applies to:

- Correct setting (See setting instruction)
- No edge distance and spacing influence
- Steel failure
- Minimum base material thickness
- Concrete C 20/25, $f_{ck,cube} = 25 \text{ N/mm}^2$

Effective anchorage depth for static

| Anchor size | M10 | M12 | M16 | M20 |
|------------------------------------|-----|-----|-----|-----|
| Eff. Anchorage depth h_{ef} [mm] | 100 | 125 | 190 | 250 |

Characteristic resistance

| Anchor size | | M10 | M12 | M16 | M20 ^{a)} | | | | | | | | | | | |
|---|---------------------------------------|--------------------|------------------|-----|-------------------|-----|-----|-------------------|-----|-----|-----|-----|-----|-----|-----|------|
| Non-cracked concrete | | | | | | | | | | | | | | | | |
| Tension N_{Rk} | HDA-P(F), HDA-T(F) ^{b)} [kN] | 46 | 67 | 126 | 192 | | | | | | | | | | | |
| | HDA-PR, HDA-TR | 46 | 67 | 126 | - | | | | | | | | | | | |
| Cracked concrete | | | | | | | | | | | | | | | | |
| Tension N_{Rk} | HDA-P(F), HDA-T(F) ^{b)} [kN] | 25 | 35 | 75 | 95 | | | | | | | | | | | |
| | HDA-PR, HDA-TR | 25 | 35 | 75 | - | | | | | | | | | | | |
| Non-cracked and cracked concrete | | | | | | | | | | | | | | | | |
| Shear V_{Rk} | HDA-T(F) ^{b)} | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | $t_{fix,max}$ | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V_{Rk} [kN] | 65 ^{c)} | 70 | 80 | 80 | 100 | 140 ^{c)} | 140 | 155 | 170 | 190 | 205 | 205 | 235 | 250 |
| | HDA-TR | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | $t_{fix,max}$ | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V_{Rk} [kN] | 71 ^{c)} | 71 | 87 | 87 | 94 | 109 | 152 | 152 | 158 | 170 | - | | | |
| | HDA-P(F) ^{b)} [kN] | | 22 | 30 | | 62 | | | 92 | | | | | | | |
| | HDA-PR | | 23 | 34 | | 63 | | | - | | | | | | | |

- a) HDA M20: only galvanized 5µm version is available.
 b) HDA-PF and HDA-TF: anchors are not covered by ETA-99/0009.
 c) With use of centering washer ($t=5\text{mm}$) only.



Design resistance

| Anchor size | | M10 | M12 | M16 | | | | M20 ^{a)} | | | | | | | | |
|---|----------------------------------|----------------------|--------------------|------|--------------------|------|------|--------------------|---------------------|-------|-------|-------|---------------------|-------|-------|-------|
| Non-cracked concrete | | | | | | | | | | | | | | | | |
| Tension N _{Rk} | HDA-P(F), HDA-T(F) ^{b)} | 30,7 | 44,7 | 84,0 | | | | 128,0 | | | | | | | | |
| | HDA-PR, HDA-TR | 28,8 | 41,9 | 78,8 | | | | - | | | | | | | | |
| Cracked concrete | | | | | | | | | | | | | | | | |
| Tension N _{Rd} | HDA-P(F), HDA-T(F) ^{b)} | 16,7 | 23,3 | 50,0 | | | | 63,3 | | | | | | | | |
| | HDA-PR, HDA-TR | 16,7 | 23,3 | 50,0 | | | | - | | | | | | | | |
| Non-cracked and cracked concrete | | | | | | | | | | | | | | | | |
| Shear V _{Rd} | HDA-T(F) ^{b)} | t _{fix,min} | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | t _{fix,max} | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V _{Rk} | 43,3 ^{c)} | 46,7 | 53,3 ^{c)} | 53,3 | 66,7 | 93,3 ^{c)} | 93,3 | 103,3 | 113,3 | 126,7 | 136,7 ^{c)} | 136,7 | 156,7 | 166,7 |
| | HDA-TR | t _{fix,min} | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | t _{fix,max} | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V _{Rk} | 53,4 ^{c)} | 53,4 | 65,4 ^{c)} | 65,4 | 70,7 | 82,0 | 114,3 ^{c)} | 114,3 | 118,8 | 127,8 | - | | | |
| | HDA-P(F) ^{b)} | | 17,6 | | 24,0 | | 49,6 | | | | 73,6 | | | | | |
| | HDA-PR | | 17,3 | | 25,6 | | 47,4 | | | | - | | | | | |

- a) HDA M20: only galvanized 5µm version is available.
b) HDA-PF and HDA-TF: anchors are not covered by ETA-99/0009.
c) With use of centering washer (t=5mm) only.

Recommended loads ^{d)}

| Anchor size | | M10 | M12 | M16 | | | | M20 ^{a)} | | | | | | | | |
|---|----------------------------------|----------------------|------------------|------|------------------|-----|------|-------------------|------------------|-----|------|-----|------------------|-----|-----|------|
| Non-cracked concrete | | | | | | | | | | | | | | | | |
| Tension N _{Rk} | HDA-P(F), HDA-T(F) ^{b)} | 21,9 | 31,9 | 60,0 | | | | 91,4 | | | | | | | | |
| | HDA-PR, HDA-TR | 20,5 | 29,9 | 56,3 | | | | - | | | | | | | | |
| Cracked concrete | | | | | | | | | | | | | | | | |
| Tension N _{Rec} | HDA-P(F), HDA-T(F) ^{b)} | 11,9 | 16,7 | 35,7 | | | | 45,2 | | | | | | | | |
| | HDA-PR, HDA-TR | 11,9 | 16,7 | 35,7 | | | | - | | | | | | | | |
| Non-cracked and cracked concrete | | | | | | | | | | | | | | | | |
| Shear V _{Rec} | HDA-T(F) ^{b)} | t _{fix,min} | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | t _{fix,max} | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V _{Rk} | 31 ^{c)} | 31 | 38 ^{c)} | 38 | 38 | 67 ^{c)} | 67 | 74 | 81 | 90 | 98 ^{c)} | 98 | 112 | 119 |
| | HDA-TR | t _{fix,min} | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | t _{fix,max} | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V _{Rk} | 38 ^{c)} | 38 | 47 ^{c)} | 47 | 50 | 59 | 82 ^{c)} | 82 | 85 | 91 | - | | | |
| | HDA-P(F) ^{b)} | | 12,6 | | 17,1 | | 35,4 | | | | 52,6 | | | | | |
| | HDA-PR | | 12,3 | | 18,2 | | 33,8 | | | | - | | | | | |

- a) HDA M20: only galvanized 5µm version is available.
b) HDA-PF and HDA-TF: anchors are not covered by ETA-99/0009
c) With use of centering washer (t=5mm) only
d) With overall partial safety factor for action γ_F = 1,4. The partial safety factors for action depend on the type of loading.



Seismic resistance

All data in this section applies to:

- Correct setting (See setting instruction with a drilling hammer)
- No edge distance and spacing influence
- Steel failure
- Minimum base material thickness
- Concrete C 20/25, $f_{ck,cube} = 25 \text{ N/mm}^2$
- $\alpha_{gap} = 1,0$ (using Hilti seismic filling set)

Effective anchorage depth for seismic C2 and C1

| Anchor size | M10 | M12 | M16 | M20 |
|------------------------------------|-----|-----|-----|-----|
| Eff. Anchorage depth h_{ef} [mm] | 100 | 125 | 190 | 250 |

Characteristic resistance in case of seismic performance category C2

| Anchor size | | M10 | M12 | | | M16 | | | | | M20 ^{a)} | | | | | |
|--------------------------|---------------------|--------------------|------|------|------|------|------|------|------|------|-------------------|-----|-----|-----|-----|------|
| Tension $N_{Rk,seis}$ | HDA-P, HDA-T [kN] | 25 | 35 | | | 75 | | | | | 95 | | | | | |
| | HDA-PR, HDA-TR [kN] | 25 | 35 | | | 75 | | | | | - | | | | | |
| Shear $V_{Rk,seis}$ | HDA-T | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V_{Rk} [kN] | 39 | 42 | 56 | 56 | 70 | 84 | 84 | 93 | 102 | 112 | 144 | 144 | 165 | 175 |
| | HDA-TR | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V_{Rk} [kN] | 21,5 | 21,5 | 30,5 | 30,5 | 33,0 | 38,0 | 45,5 | 45,5 | 47,5 | 51 | - | | | |
| | HDA-P [kN] | | 20 | | 24 | | | 56 | | | | | 83 | | | |
| | HDA-PR [kN] | | 10,5 | | 13,5 | | | 28,5 | | | | | - | | | |

a) HDA M20: only galvanized 5 μ m version is available

Design resistance in case of seismic performance category C2

| Anchor size | | M10 | M12 | | | M16 | | | | | M20 ^{a)} | | | | | |
|--------------------------|---------------------|--------------------|------|------|------|------|------|------|------|------|-------------------|------|------|-----|-----|-------|
| Tension $N_{Rd,seis}$ | HDA-P, HDA-T [kN] | 16,7 | 23,3 | | | 50 | | | | | 63,3 | | | | | |
| | HDA-PR, HDA-TR [kN] | 16,7 | 23,3 | | | 50 | | | | | - | | | | | |
| Shear $V_{Rd,seis}$ | HDA-T | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V_{Rk} [kN] | 26 | 28 | 37,3 | 37,3 | 46,7 | 56 | 56 | 62 | 68 | 74,7 | 96 | 96 | 110 | 116,7 |
| | HDA-TR | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V_{Rk} [kN] | 16,2 | 16,2 | 22,9 | 22,9 | 24,8 | 28,6 | 34,2 | 34,2 | 35,7 | 38,3 | - | | | |
| | HDA-P [kN] | | 16 | | 19,2 | | | 44,8 | | | | | 66,4 | | | |
| | HDA-PR [kN] | | 7,9 | | 10,2 | | | 21,4 | | | | | - | | | |

a) HDA M20: only galvanized 5 μ m version is available


Characteristic resistance in case of seismic performance category C1

| Anchor size | | M10 | M12 | | | | M16 | | | | | M20 ^{a)} | | | | |
|--------------------------|---------------------|--------------------|------|------|------|------|-----|-------|-----|-----|-----|-------------------|-----|-----|-----|------|
| Tension $N_{Rk,seis}$ | HDA-P, HDA-T [kN] | 41,5 | | 58 | | | | 108,7 | | | | | 164 | | | |
| | HDA-PR, HDA-TR [kN] | 41,5 | | 58 | | | | 108,7 | | | | | - | | | |
| Shear $V_{Rk,seis}$ | HDA-T | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V_{Rk} [kN] | 65 | 70 | 80 | 80 | 100 | 140 | 140 | 155 | 170 | 190 | 205 | 205 | 235 | 250 |
| | HDA-TR | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V_{Rk} [kN] | 35,5 | 35,5 | 43,5 | 43,5 | 47 | 54,5 | 76 | 76 | 79 | 85 | - | | | |
| | HDA-P [kN] | 20 | | 22 | | | | 30 | | | | | 62 | | | |
| HDA-PR [kN] | 10,5 | | 11,5 | | | | 17 | | | | | 31,5 | | | | |

a) HDA M20: only galvanized 5µm version is available

Design resistance in case of seismic performance category C1

| Anchor size | | M10 | M12 | | | | M16 | | | | | M20 ^{a)} | | | | |
|--------------------------|---------------------|--------------------|------|------|------|------|------|------|------|-------|-------|-------------------|-------|-------|-------|-------|
| Tension $N_{Rd,seis}$ | HDA-P, HDA-T [kN] | 27,7 | | 38,7 | | | | 72,5 | | | | | 109,4 | | | |
| | HDA-PR, HDA-TR [kN] | 27,7 | | 38,7 | | | | 72,5 | | | | | - | | | |
| Shear $V_{Rd,seis}$ | HDA-T | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 15≤ | 20≤ | 25≤ | 30≤ | 35≤ | 20≤ | 25≤ | 40≤ | 55≤ |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | ≤50 | <20 | <25 | <30 | <35 | ≤60 | <25 | <40 | <55 | ≤100 |
| | | V_{Rk} [kN] | 43,3 | 46,7 | 53,3 | 53,3 | 66,7 | 93,3 | 93,3 | 103,3 | 113,3 | 126,7 | 136,7 | 136,7 | 156,7 | 166,7 |
| | HDA-TR | $t_{fix,min}$ [mm] | 10≤ | 15≤ | 10≤ | 15≤ | 20≤ | 30≤ | 15≤ | 20≤ | 25≤ | 35≤ | - | | | |
| | | $t_{fix,max}$ [mm] | <15 | ≤20 | <15 | <20 | <30 | ≤50 | <20 | <25 | <35 | ≤60 | - | | | |
| | | V_{Rk} [kN] | 26,7 | 26,7 | 32,7 | 32,7 | 35,3 | 41 | 57,1 | 57,1 | 59,4 | 63,9 | - | | | |
| | HDA-P [kN] | 17,6 | | 24 | | | | 49,6 | | | | | 73,6 | | | |
| HDA-PR [kN] | 8,6 | | 12,8 | | | | 23,7 | | | | | - | | | | |

a) HDA M20: only galvanized 5µm version is available



Fatigue resistance

All data in this section applies to:


- Correct setting using Hilti filling set (See setting instruction)
- No edge distance and spacing influence
- Minimum base material thickness
- Cracked and uncracked concrete

| Fastener size | | M10 | M12 | M16 | M20 |
|--|---------------------------------|------|------|------|------|
| Fatigue tension load | | | | | |
| Steel failure | | | | | |
| Characteristic resistance | $\Delta N_{Rk,s,0,\infty}$ [kN] | 9,2 | 16,3 | 22,7 | 26,7 |
| Partial factor | $\gamma_{Ms,N,fat}$ [-] | 1,35 | | | |
| Concrete failure | | | | | |
| Effective embedment depth | h_{ef} [mm] | 100 | 125 | 190 | 250 |
| Reduction factor ¹⁾ | $\eta_{k,c,N,fat,\infty}$ [-] | 0,64 | | | |
| Partial factor | $\gamma_{Mc,fat}$ [-] | 1,5 | | | |
| Load transfer factor for fastener groups | ψ_{FN} [-] | 0,77 | | | |
| Fatigue shear load | | | | | |
| Steel failure | | | | | |
| Characteristic resistance HDA-P | $\Delta V_{Rk,s,0,\infty}$ [kN] | 2,5 | 6,0 | 9,0 | 17,5 |
| Characteristic resistance HDA-T | $\Delta V_{Rk,s,0,\infty}$ [kN] | 8,5 | 15,0 | 23,0 | 17,5 |
| Partial factor | $\gamma_{Ms,V,fat}$ [-] | 1,35 | | | |
| Concrete failure | | | | | |
| Effective length of fastener | l_f [m] | 70 | 88 | 90 | 120 |
| Effective outside diameter of fastener | d_{nom} [m] | 19 | 21 | 29 | 35 |
| Reduction factor ²⁾ | $\eta_{k,c,V,fat,\infty}$ [-] | 0,55 | | | |
| Partial factor | $\gamma_{Mc,fat}$ [-] | 1,5 | | | |
| Load transfer factor for fastener groups | ψ_{FV} [-] | 0,83 | | | |
| Combined fatigue load | | | | | |
| Exponent for combined fatigue load | α_{sn} [-] | 1,0 | | | 1,25 |
| | α_c [-] | 1,5 | | | |



¹⁾ $\Delta N_{Rk,(c,sp,cb),0,\infty} = \eta_{k,c,N,fat,\infty} \cdot N_{Rk,(c,sp,cb)}$ with $N_{Rk,(c,sp,cb)}$ according to ETA-99/0009.

²⁾ $\Delta V_{Rk,(c,cp),0,\infty} = \eta_{k,c,V,fat,\infty} \cdot V_{Rk,(c,cp)}$ with $V_{Rk,(c,cp)}$ according to ETA-99/0009.

Characteristic Wöhler curve under tension fatigue load

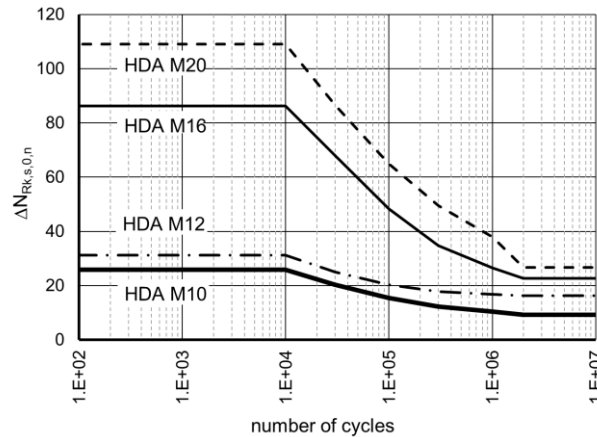

Characteristic Wöhler curve under shear fatigue load

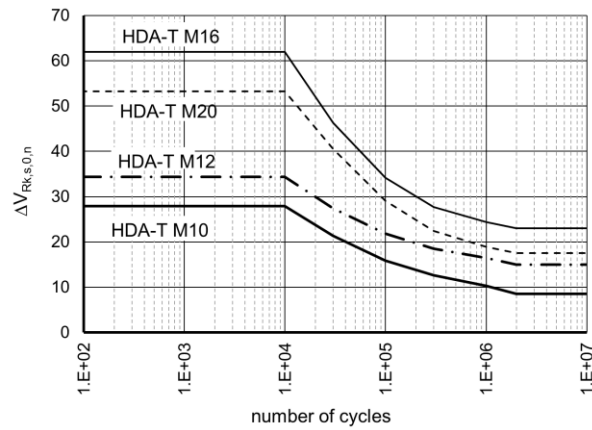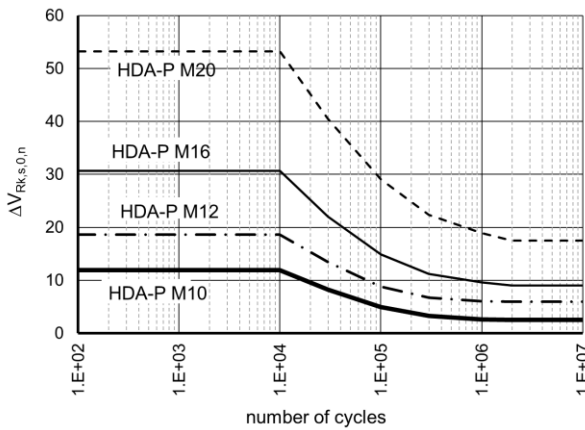

Materials

Mechanical properties of HDA

| Anchor size | HDA-P(F), HDA-T(F) | | | | HDA-PR, HDA-TR | | |
|---|--------------------|-------|-------|-------------------|----------------|-------|-------|
| | M10 | M12 | M16 | M20 ^{a)} | M10 | M12 | M16 |
| Anchor bolt | | | | | | | |
| Nominal tensile strength f_{uk} [N/mm ²] | 800 | 800 | 800 | 800 | 800 | 800 | 800 |
| Yield strength f_{yk} | 640 | 640 | 640 | 640 | 600 | 600 | 600 |
| Stressed cross-section A_s [mm ²] | 58,0 | 84,3 | 157 | 245 | 58,0 | 84,3 | 157 |
| Moment of resistance W_{el} [mm ³] | 62,3 | 109,2 | 277,5 | 540,9 | 62,3 | 109,2 | 277,5 |
| Characteristic bending resistance without sleeve $M_{Rk,s}^{0,b)}$ [Nm] | 60 | 105 | 266 | 519 | 60 | 105 | 266 |
| Anchor sleeve | | | | | | | |
| Nominal tensile strength f_{uk} [N/mm ²] | 850 | 850 | 700 | 550 | 850 | 850 | 700 |
| Yield strength f_{yk} | 600 | 600 | 600 | 450 | 600 | 600 | 600 |

a) HDA M20: only a galvanized 5 μ m version is available

b) The recommended bending moment of the HDA anchor bolt may be calculated from $M_{rec} = M_{Rd,s} / \gamma_F = M_{Rk,s} / (\gamma_{Ms} \cdot \gamma_F) = (1,2 \cdot W_{el} \cdot f_{uk}) / (\gamma_{Ms} \cdot \gamma_F)$, where the partial safety factor for bolts of strength 8.8 is $\gamma_{Ms} = 1,25$, for A4-80 equal to 1,33 and the partial safety factor for action may be taken as $\gamma_F = 1,4$. In case of HDA-T/TR/TF the bending capacity of the sleeve is neglected, only the capacity of the bolt is taken into account.



http://hilti.to/traceable-fastener




Material quality

| Part | Material |
|------------------------|---|
| HDA-P / HDA-T | |
| Sleeve: | Machined steel with brazed tungsten carbide tips, galvanized to min. 5 µm |
| Bolt M10 - M16: | Cold formed steel, strength 8.8, galvanized to min. 5 µm |
| Bolt M20: | Cone machined, rod strength 8.8, galvanized to min. 5 µm |
| Washer M10-M16: | Spring washer, galvanized or coated |
| Washer M20: | Washer, galvanized |
| Centering washer | Machined steel |
| HDA-PR / HDA-TR | |
| Sleeve: | Machined stainless steel with brazed tungsten carbide tips |
| Bolt M10 - M16: | Cone/rod: machined stainless steel |
| Washer | Spring washer stainless steel |
| Centering washer | Machined steel |
| HDA-PF / HDA-TF | |
| Sleeve | Machined steel with brazed tungsten carbide tips, sherardized |
| Bolt M10-M16: | Cold formed steel, strength 8.8, sherardized |


Anchor dimensions

| Anchor size | HDA-P / HDA-PR / HDA-T / HDA-TR / HDA-PF / HDA-TF | | | | | | | | | |
|-------------------------------|---|------|---------|---------|---------|---------|---------|---------|----------|--|
| | | | M10 | | M12 | | M16 | | M20 | |
| | | | x100/20 | x125/30 | x125/50 | x190/40 | x190/60 | x250/50 | x250/100 | |
| Length code letter | | | I | L | N | R | S | V | X | |
| Total length of bolt | l_B | [mm] | 150 | 190 | 210 | 275 | 295 | 360 | 410 | |
| Diameter of bolt | d_B | [mm] | 10 | 12 | | 16 | | 20 | | |
| Total length of sleeve | | | | | | | | | | |
| HDA-P | l_s | [mm] | 100 | 125 | 125 | 190 | 190 | 250 | 250 | |
| HDA-T | l_s | [mm] | 120 | 155 | 175 | 230 | 250 | 300 | 350 | |
| Max. diameter of sleeve | d_s | [mm] | 19 | 21 | | 29 | | 35 | | |
| Washer diameter | d_w | [mm] | 27,5 | 33,5 | | 45,5 | | 50 | | |
| Width across flats | S_w | [mm] | 17 | 19 | | 24 | | 30 | | |

HDA-P / HDA-PR

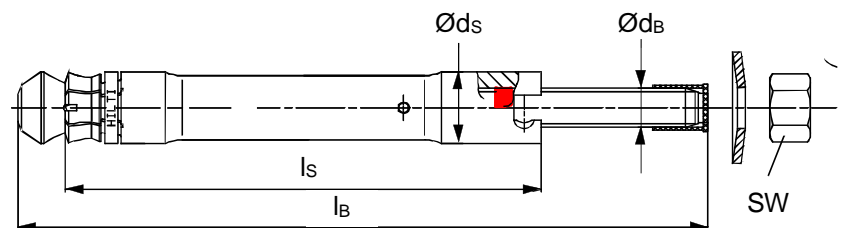



HDA-T / HDA-TR

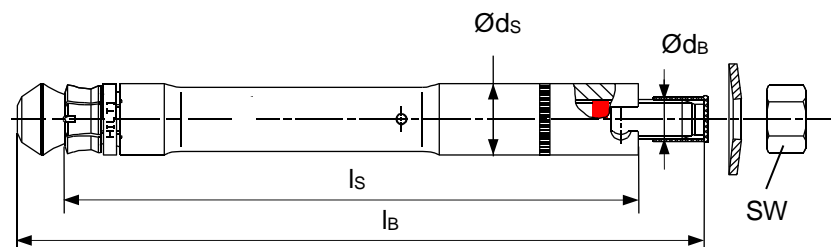

Setting information

Setting details

| Anchor size | | | HDA-P / HDA-PR / HDA-T / HDA-TR | | | | | | | |
|---|-----------------|------|---------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| | | | M10 | | M12 | | M16 | | M20 | |
| | | | x100/20 | x125/30 | x125/50 | x190/40 | x190/60 | x250/50 | x250/100 | |
| Length code letter | | | I | L | N | R | S | V | X | |
| Nominal drill bit diameter | d_0 | [mm] | 20 | 22 | | 30 | | 37 | | |
| Cutting diameter of drill bit | $d_{cut,min}$ | [mm] | 20,10 | 22,10 | | 30,10 | | 37,15 | | |
| | $d_{cut,max}$ | [mm] | 20,55 | 22,55 | | 30,55 | | 37,70 | | |
| Depth of drill hole | $h_1 \geq$ | [mm] | 107 | 133 | | 203 | | 266 | | |
| Anchorage depth | h_{ef} | [mm] | 100 | 125 | | 190 | | 250 | | |
| Sleeve recess | $h_{s,min}$ | [mm] | 2 | 2 | | 2 | | 2 | | |
| | $h_{s,max}$ | [mm] | 6 | 7 | | 8 | | 8 | | |
| Torque moment | T_{inst} | [Nm] | 50 | 80 | | 120 | | 300 | | |
| For HDA-P/-PR/-PF | | | | | | | | | | |
| Clearance hole | d_f | [mm] | 12 | 14 | | 18 | | 22 | | |
| Minimum base material thickness | h_{min} | [mm] | 180 | 200 | | 270 | | 350 | | |
| Fixture thickness | $t_{fix,min}$ | [mm] | 0 | 0 | | 0 | | 0 | | |
| | $t_{fix,max}$ | [mm] | 20 | 30 | 50 | 40 | 60 | 50 | 100 | |
| For HDA-T/-TR/-TF | | | | | | | | | | |
| Clearance hole | d_f | [mm] | 21 | 23 | | 32 | | 40 | | |
| Minimum base material thickness | h_{min} | [mm] | 200- t_{fix} | 230- t_{fix} | 250- t_{fix} | 310- t_{fix} | 330- t_{fix} | 400- t_{fix} | 450- t_{fix} | |
| Min. fixture thickness | | | | | | | | | | |
| Tension load only! | $t_{fix,min}$ | [mm] | 10 | 10 | | 15 | | 20 | 50 | |
| Shear load without use of centering washer | $t_{fix,min}$ | [mm] | 15 | 15 | | 20 | | 25 | 50 | |
| Shear load - with use of centering washer | $t_{fix,min}^b$ | [mm] | 10 | 10 | | 15 | | 20 | - | |
| Max. fixture thickness | $t_{fix,max}$ | [mm] | 20 | 30 | 50 | 40 | 60 | 50 | 100 | |

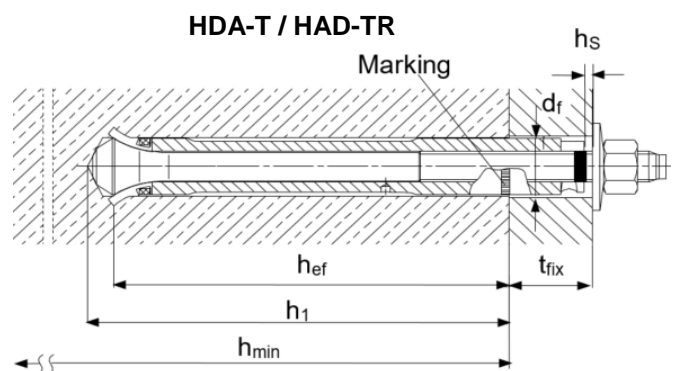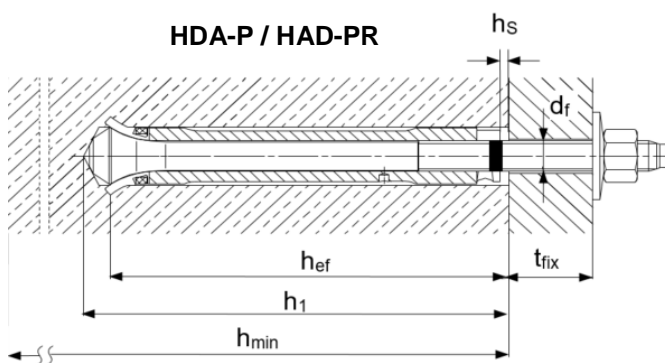




Setting parameters

| Anchor size | HDA-P / HDA-PR / HDA-T / HDA-TR | | | | | | |
|--|---------------------------------|---------|---------|---------|---------|---------|----------|
| | M10 | M12 | | M16 | | M20 | |
| | x100/20 | x125/30 | x125/50 | x190/40 | x190/60 | x250/50 | x250/100 |
| Minimum spacing s_{min} [mm] | 100 | 125 | | 190 | | 250 | |
| Minimum edge distance c_{min} [mm] | 80 | 100 | | 150 | | 200 | |
| Critical spacing for splitting failure $s_{cr,sp}$ [mm] | 300 | 375 | | 570 | | 750 | |
| Critical edge distance for splitting failure $c_{cr,sp}$ [mm] | 150 | 190 | | 285 | | 375 | |
| Critical spacing for concrete cone failure $s_{cr,N}$ [mm] | 300 | 375 | | 570 | | 750 | |
| Critical edge distance for concrete cone failure $c_{cr,N}$ [mm] | 150 | 190 | | 285 | | 375 | |

For spacing (edge distance) smaller than critical spacing (critical edge distance) the design loads have to be reduced.


Critical spacing and critical edge distance for splitting failure apply only for non-cracked concrete. For cracked concrete only the critical spacing and critical edge distance for concrete cone failure are decisive.

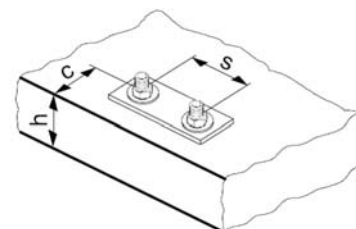

Stop drill bit HDA

The stop drill is required for drilling in order to achieve the correct hole depth.

The setting system (tool and setting tool) is required for transferring the specific energy for the undercutting process.

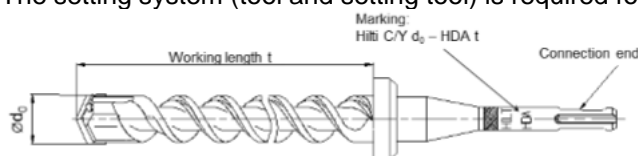

Required stop drill bits for HDA and HDA-R

| Anchor | Stop drill bit with TE-C (SDS plus) connection end | Stop drill bit with TE-Y (SDS max) connection end | Nominal working length t [mm] | Drill bit diameter d_0 [mm] |
|--|--|---|-------------------------------|-------------------------------|
| HDA-P/ PF/ PR M10x100/20 | TE-C-HDA-B 20x100 | TE-Y-HDA-B 20x100 | 107 | 20 |
| HDA-T/ TF/ TR M10x100/20 | TE-C-HDA-B 20x120 | TE-Y-HDA-B 20x120 | 127 | 20 |
| HDA-P/ PF/ PR M12x125/30 HDA-P/ PF/ PR M12x125/50 | TE-C HDA-B 22x125 | TE-Y HDA-B 22x125 | 133 | 22 |
| HDA-T/ TF/ TR M12x125/30 | TE-C HDA-B 22x155 | TE-Y HDA-B 22x155 | 163 | 22 |
| HDA-T/ TF/ TR M12x125/50 | TE-C HDA-B 22x175 | TE-Y HDA-B 22x175 | 183 | 22 |
| HDA-P/ PF/ PR M16 x190/40 HDA-P/ PF/ PR M16 x190/60 | | TE-Y HDA-B 30x190 | 203 | 30 |
| HDA-T/ TF/ TR M16x190/40 | | TE-Y HDA-B 30x230 | 243 | 30 |
| HDA-T/ TF/ TR M16x190/60 | | TE-Y HDA-B 30x250 | 263 | 30 |
| HDA-P M20 x250/50 HDA-P M20 x250/100 | | TE-Y HDA-B 37x250 | 266 | 37 |
| HDA-T M20x250/50 | | TE-Y HDA-B 37x300 | 316 | 37 |
| HDA-T M20x250/100 | | TE-Y HDA-B 37x350 | 366 | 37 |



| Anchor | TE 24 a) TE 25 a) | | TE 30-A36 | TE 35 | TE 40 TE 40 AVR | TE 56 TE 56-ATC | TE 60 TE 60-ATC | TE 70 b) TE 70-ATC b) | TE 75 | TE 76 TE 76-ATC | TE 80-ATC TE 80-ATC AVR | Setting tool |
|---|----------------------|---|-----------|-------|--------------------|--------------------|--------------------|--------------------------|-------|--------------------|----------------------------|--|
| | | | | | | | | | | | | |
| HDA-P/T M10x100/20 | ■ | ■ | ■ | | ■ | | ■ | | | | | TE-C-HDA-ST 20 M10 TE-Y-HDA-ST 20 M10 |
| HDA-P/T M12x125/30 HDA-P/T M12x125/50 | ■ | ■ | ■ | | ■ | | ■ | | | | | TE-C-HDA-ST 22 M12 TE-Y-HDA-ST 22 M12 |
| HDA-P/T M16x190/40 HDA-P/T M16x190/60 | | | | | | | | ■ | ■ | ■ | ■ | TE-Y-HDA-ST 30 M16 |
| HDA-P/T M20x250/50 HDA-P/T M20x250/100 | | | | | | | | ■ | | ■ | ■ | TE-Y-HDA-ST 37 M20 |

a) 1st gear

b) With TE 70 hmin = 340 mm - tfix for tfix,max = 40 mm and hmin = 360 mm - tfix for tfix,max = 60 mm when using HDA-T(TR) M16

| Anchor | TE 24 a) TE 25 a) | | TE 30-A36 | TE 35 | TE 40 TE 40 AVR | TE 56 TE 56-ATC | TE 60 TE 60-ATC | TE 70 b) TE 70-ATC b) | TE 75 | TE 76 TE 76-ATC | TE 80-ATC TE 80-ATC AVR | Setting tool |
|--|----------------------|---|-----------|-------|--------------------|--------------------|--------------------|--------------------------|-------|--------------------|----------------------------|--|
| | | | | | | | | | | | | |
| HDA-PR/TR M10x100/20 | ■ | ■ | ■ | ■ | ■ | | ■ | | | | | TE-C-HDA-ST 20 M10 TE-Y-HDA-ST 20 M10 |
| HDA-PR/TR M12x125/30 HDA-PR/TR M12x125/50 | ■ | ■ | ■ | ■ | ■ | | ■ | | | | | TE-C-HDA-ST 22 M12 TE-Y-HDA-ST 22 M12 |
| HDA-PR/TR M16x190/40 HDA-PR/TR M16x190/60 | | | | | | | | ■ | ■ | ■ | ■ | TE-Y-HDA-ST 30 M16 |

a) 1st gear

b) With TE 70 hmin = 340 mm - tfix for tfix,max = 40 mm and hmin = 360 mm - tfix for tfix,max = 60 mm when using HDA-T(TR) M16

| Anchor | TE 24 a) TE 25 a) | | TE 30-A36 | TE 35 | TE 40 TE 40 AVR | TE 56 TE 56-ATC | TE 60 TE 60-ATC | TE 70 TE 70-ATC | TE 75 | TE 76 TE 76-ATC | TE 80-ATC TE 80-ATC AVR | Setting tool |
|--|----------------------|--|-----------|-------|--------------------|--------------------|--------------------|--------------------|-------|--------------------|----------------------------|--------------------|
| | | | | | | | | | | | | |
| HDA-PF/TF M10x100/20 | | | ■ | ■ | ■ | | ■ | | | | | TE-C-HDA-ST 20 M10 |
| HDA-PF/TF M12x125/30 HDA-PF/TF M12x125/50 | | | ■ | ■ | ■ | | ■ | | | | | TE-C-HDA-ST 22 M12 |
| HDA-PF/TF M16x190/40 HDA-PF/TF M16x190/60 | | | | | | | | ■ | ■ | ■ | ■ | TE-Y-HDA-ST 30 M16 |

a) 1st gear



Setting instructions

*For detailed information on installation see instruction for use given with the package of the product.

| HDA-P / HDA-PR (prepositioning) | |
|--|--|
| 1. Drilling | 2. Cleaning |
| 3. Inserting the anchor by hand | 4. Applying hammer drill |
| 5. Applying hammer drill | 6. Checking |
| 7. Attaching the fixture | 8. Attaching the belonging washer |



HDA-T / HDA-TR / HAD-TF (post-positioning)

| | |
|---|---------------------------------------|
| <p>1. Drilling</p> | <p>2. Cleaning</p> |
| <p>3. Inserting the anchor by hand</p> | <p>4. Applying hammerdrill</p> |
| <p>5. Checking</p> | <p>6. Checking</p> |
| <p>7. Attaching the belonging washer</p> | |



tracefast

<http://hilti.to/traceable-fastener>

