


# DATOS TÉCNICOS

TECHNICAL DATA / DONNÉES TECHNIQUES

## Datos enrollamientos

Testeros	TAMAÑOS	EJE	LAMAS ALUMINIO PERFILADO							LAMAS PVC			LAMAS ALUMINIO EXTRUSIÓN					
			MICALUM 39	MINISAX 40	MINICUR 43	TERMILUM 45	TERMSAX 45	TERMICUR 45	TERMICUR 55	L 37	C 42	L 50	MINISEGUR 40	BLOCKALUM 39	BLOCKALUM 45	BIOCLIM 45	BLOCKALUM 60	EC 60
Energy Cube Passive (PVC)	200 Motor	Ø 60	2,70	1,60	2,40	2,40	1,50	2,30	-	1,90	1,70	1,80	1,65	2,00	1,85	1,20	-	-
	200 Cinta	Ø 40	1,95	1,25	1,70	1,70	1,00	1,50	-	1,65	1,25	1,15	-	-	-	-	-	-

PASSIVE 200 PARA EL ACCIONAMIENTO A MOTOR

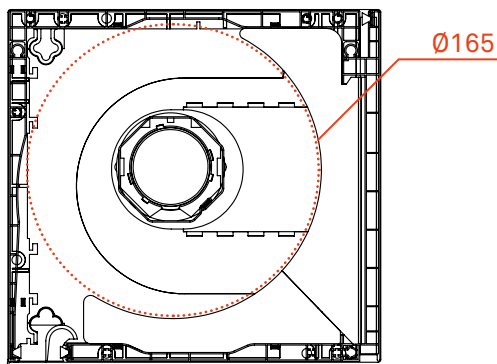

PASSIVE 200 PARA EL ACCIONAMIENTO A CINTA

