


TECHNICAL DATA SHEET



VWS Befestigungstechnik GmbH
Siemensstraße 2
D - 72805 Lichtenstein/Württemberg
Tel.: 00 49 (0) 71 29 / 6 95 - 1 00
Fax: 00 49 (0) 71 29 / 6 95 - 1 50
www.vws.de

page	1/1
as of	07.2012
revision	-

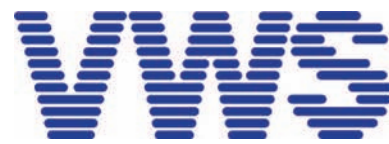

4403-24



starter track
aluminium
20 pieces
2.5 m

4403	to	4410	10 pieces	4412	to	4418
30 mm		100 mm		120 mm		180 mm

2 pieces	4420	to	4424
	200 mm		240 mm

Application: ETICS

Starter base profiles are used predominantly at thermal insulation systems / ETICS as a stop bead for the insulation boards in the base area. The starter base profile is horizontal attached with different dowels in the base area of the facade and the insulation board is placed in.

Equipment of the product:

The starter base profile is a constantly punched building profile out of blank aluminium for different insulation boards. The fixing blade with along and cross punching allows an optimal adjustment and mounting of the starter base profiles.

Important details:

Cool and dry storage

Horizontal transporting and stocking

Please allow for the processing guidelines of the manufacturer of the thermal insulation systems / ETICS.

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. You can find the latest issue of the technical data sheets of our assortment at <http://www.vws.de/tmb/en>. The stand of the revision is essential for the use of the products at the date of mounting. Printed versions could differ from the effectual stand of revision.

