
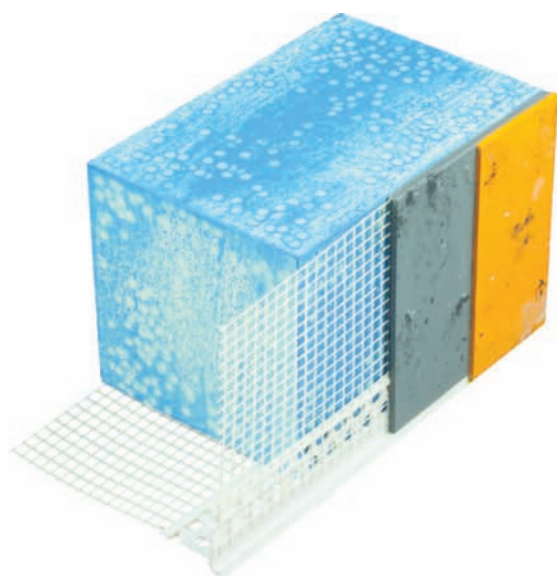


TECHNICAL DATA SHEET

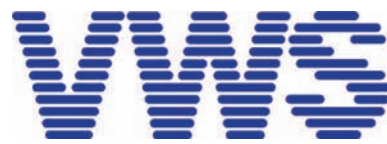

VWS Befestigungstechnik GmbH
Siemensstraße 2
D - 72805 Lichtenstein/Württemberg
Tel.: 00 49 (0) 71 29 / 6 95 - 1 00
Fax: 00 49 (0) 71 29 / 6 95 - 1 50
www.vws.de

page	1/2
as of	07.2012
revision	-

6485



dripnose bead
Exclusive
PVC with mesh
5 mm plaster
20 pieces
2.5 m

Application: ETICS

The dripnose bead acts for an exact and robust termination of render with a dripnose at roller shutter casings, underside of balconies, windows lintels, plinth weatherings without profiles etc. Due to its punched and chequered construction and its two-sided mesh stripes it achieves a very good connection with the plaster and a crack formation in this area will be minimized as far as possible!

Equipment of the product:

The dripnose bead is produced out of impact resistant and UV- and weather-proof PVC
The mesh of the dripnose bead is alkali-proof and dislocation resistant

Important details:


Cool and dry storage

Horizontal transporting and stocking


Please allow for the processing guidelines of the manufacturer of the thermal insulation systems / ETICS.

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. You can find the latest issue of the technical data sheets of our assortment at <http://www.vws.de/tmb/en>. The stand of the revision is essential for the use of the products at the date of mounting. Printed versions could differ from the effectual stand of revision.



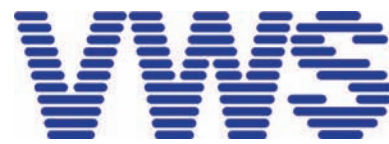

VWS Befestigungstechnik GmbH
 Siemensstraße 2
 D - 72805 Lichtenstein/Württemberg
 Tel.: 00 49 (0) 71 29 / 6 95 - 1 00
 Fax: 00 49 (0) 71 29 / 6 95 - 1 50
 www.vws.de

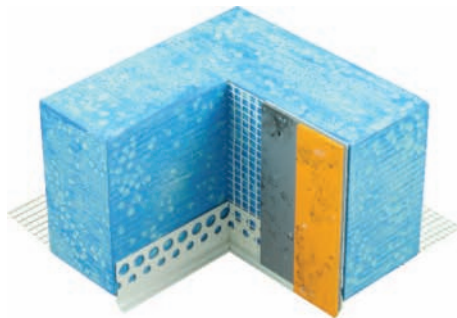

page	2/2
as of	07.2012
revision	-



648502



**dripnose
 corner profile outwards
 Exclusive
 PVC with mesh
 5 mm plaster
 10 x 10 cm
 10 pieces**

648504

**dripnose corner
 profile inwards
 Exclusive
 PVC with mesh
 5 mm plaster
 10 x 10 cm
 4 pieces**

Application: ETICS

The dripnose bead acts for an exact and robust termination of render with a dripnose at roller shutter casings, underside of balconies, windows lintels, plinth weatherings without profiles etc. Due to its punched and chequered construction and its two-sided mesh stripes it achieves a very good connection with the plaster and a crack formation in this area will be minimized as far as possible!

Equipment of the product:

The dripnose bead is produced out of impact resistant and UV- and weather-proof PVC
 The mesh of the dripnose bead is alkali-proof and dislocation resistant

Important details:

Cool and dry storage
 Horizontal transporting and stocking
 Please allow for the processing guidelines of the manufacturer of the thermal insulation systems / ETICS.

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. You can find the latest issue of the technical data sheets of our assortment at <http://www.vws.de/tmb/en>. The stand of the revision is essential for the use of the products at the date of mounting. Printed versions could differ from the effectual stand of revision.

