


# TECHNICAL DATA SHEET

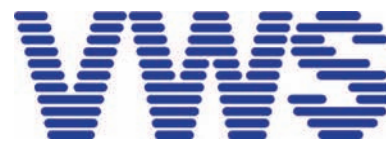

VWS Befestigungstechnik GmbH  
Siemensstraße 2  
D - 72805 Lichtenstein/Württemberg  
Tel.: 00 49 (0) 71 29 / 6 95 - 1 00  
Fax: 00 49 (0) 71 29 / 6 95 - 1 50  
www.vws.de

page	1/1
as of	07.2012
revision	-

## 6603-24



stop bead  
aluminium  
10 pieces  
2.5 m

**6603**  
30 mm

**6604**  
40 mm

**6605**  
50 mm

**6606**  
60 mm

**6607**  
70 mm

**6608**  
80 mm

**6609**  
90 mm

**6610**  
100 mm

**6611 - 6624**  
110 - 240 mm

Application: ETICS

Stop beads are used in thermal insulation systems as a lateral end or as an intersection of different thicknesses of insulating materials. With the constant punched attachment wing the profiles could be optional doweled or levelled up to the wall.

Equipment of the product:

The stop bead is a profile out of aluminium for different thicknesses of insulating materials. The attachment wing is punched constantly.

Important details:

Dry storage

Horizontal transporting and stocking

Please allow for the processing guidelines of the manufacturer of the thermal insulation systems / ETICS.

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. You can find the latest issue of the technical data sheets of our assortment at <http://www.vws.de/tmb/en>. The stand of the revision is essential for the use of the products at the date of mounting. Printed versions could differ from the effectual stand of revision.

