



2.8 Ceiling Type

Ceiling Type

MMC-AP0151H / MMC-AP0181H

MMC-AP0241H / MMC-AP0271H

MMC-AP0361H / MMC-AP0481H



Contents

1. Specifications
2. Dimension
3. Wiring diagram
4. Center of Gravity
5. Electrical current characteristics
6. Sensible capacity table
7. Air throw distance chart
8. Sound characteristics (NC-Curve)
9. Accessories



1. Specifications



Ceiling Type

Model name	MMC-	AP0151H	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H				
Cooling/Heating capacity (Note 1) (kW)		4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0				
Electrical characteristics	Power supply	1 phase 50Hz 230V (220 – 240V) (Separate power supply for indoor units is required.)									
	Running current (A)	0.29	0.32	0.42	0.78	0.84					
	Power consumption (kW)	0.033	0.038	0.050	0.091	0.110					
	Starting current (A)	0.43	0.48	0.62	1.17	1.25					
Appearance		White (Munsell 10Y 9.3/0.4)									
Outer dimension	Height x Width x Depth (mm)	210 x 910 x 680		210 x 1,180 x 680		210 x 1,595 x 680					
Total weight	(kg)	22		26		34					
Heat exchanger		Finned tube									
Soundproof/Heating-insulating material		Non-flammable insulation									
Fan unit	Fan	Centrifugal fan									
	Standard air flow (High/Mid./Low) (m ³ /h)	720/600/540	780/660/540	1,110/900/840	1,650/1,380/1,200	1,800/1,560/1,320					
	Motor output (W)	30		40		80					
Controller		Remote controller									
Room thermostat		Attached									
Air filter		Standard filter (Long life filter)									
Connecting pipe	Gas side (mm)	Ø 12.7		Ø 15.9							
	Liquid side (mm)	Ø 6.4		Ø 9.5							
	Drain port (Nominal dia. mm)	20 (Polyvinyl chloride tube)									
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))		35/32/30	36/33/30	38/36/33	41/38/35	43/40/37					

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.


Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27 °C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7 °C DB/6°C WB



2. Dimension


MMC-AP0151H, AP0181H, AP0241H, AP0271H, AP0361H, AP0481H

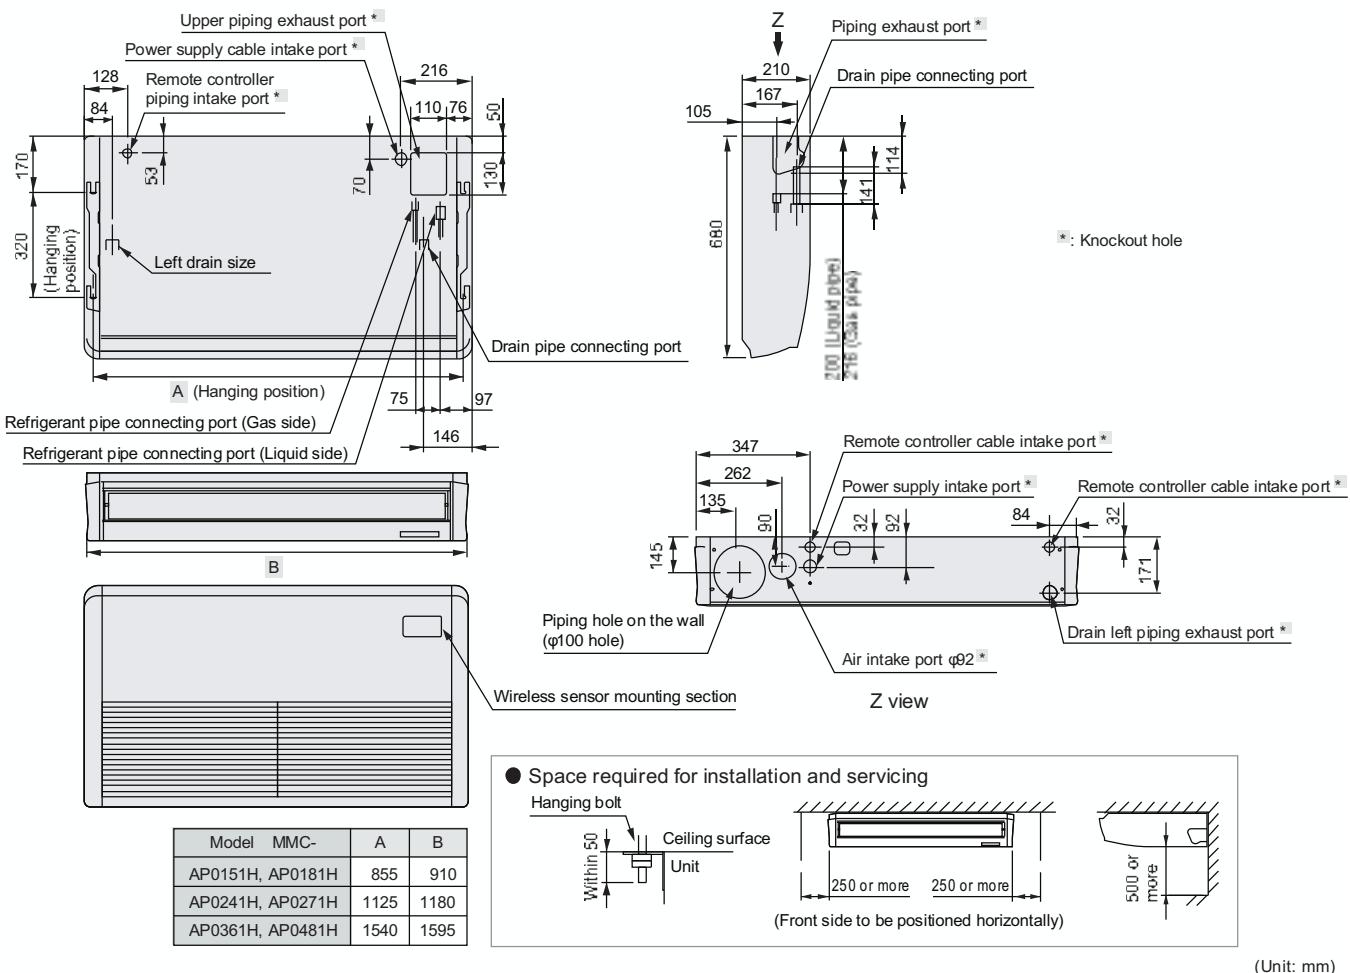



3. Wiring diagram


MMC-AP0151H, AP0181H, AP0241H, AP0271H, AP0361H, AP0481H

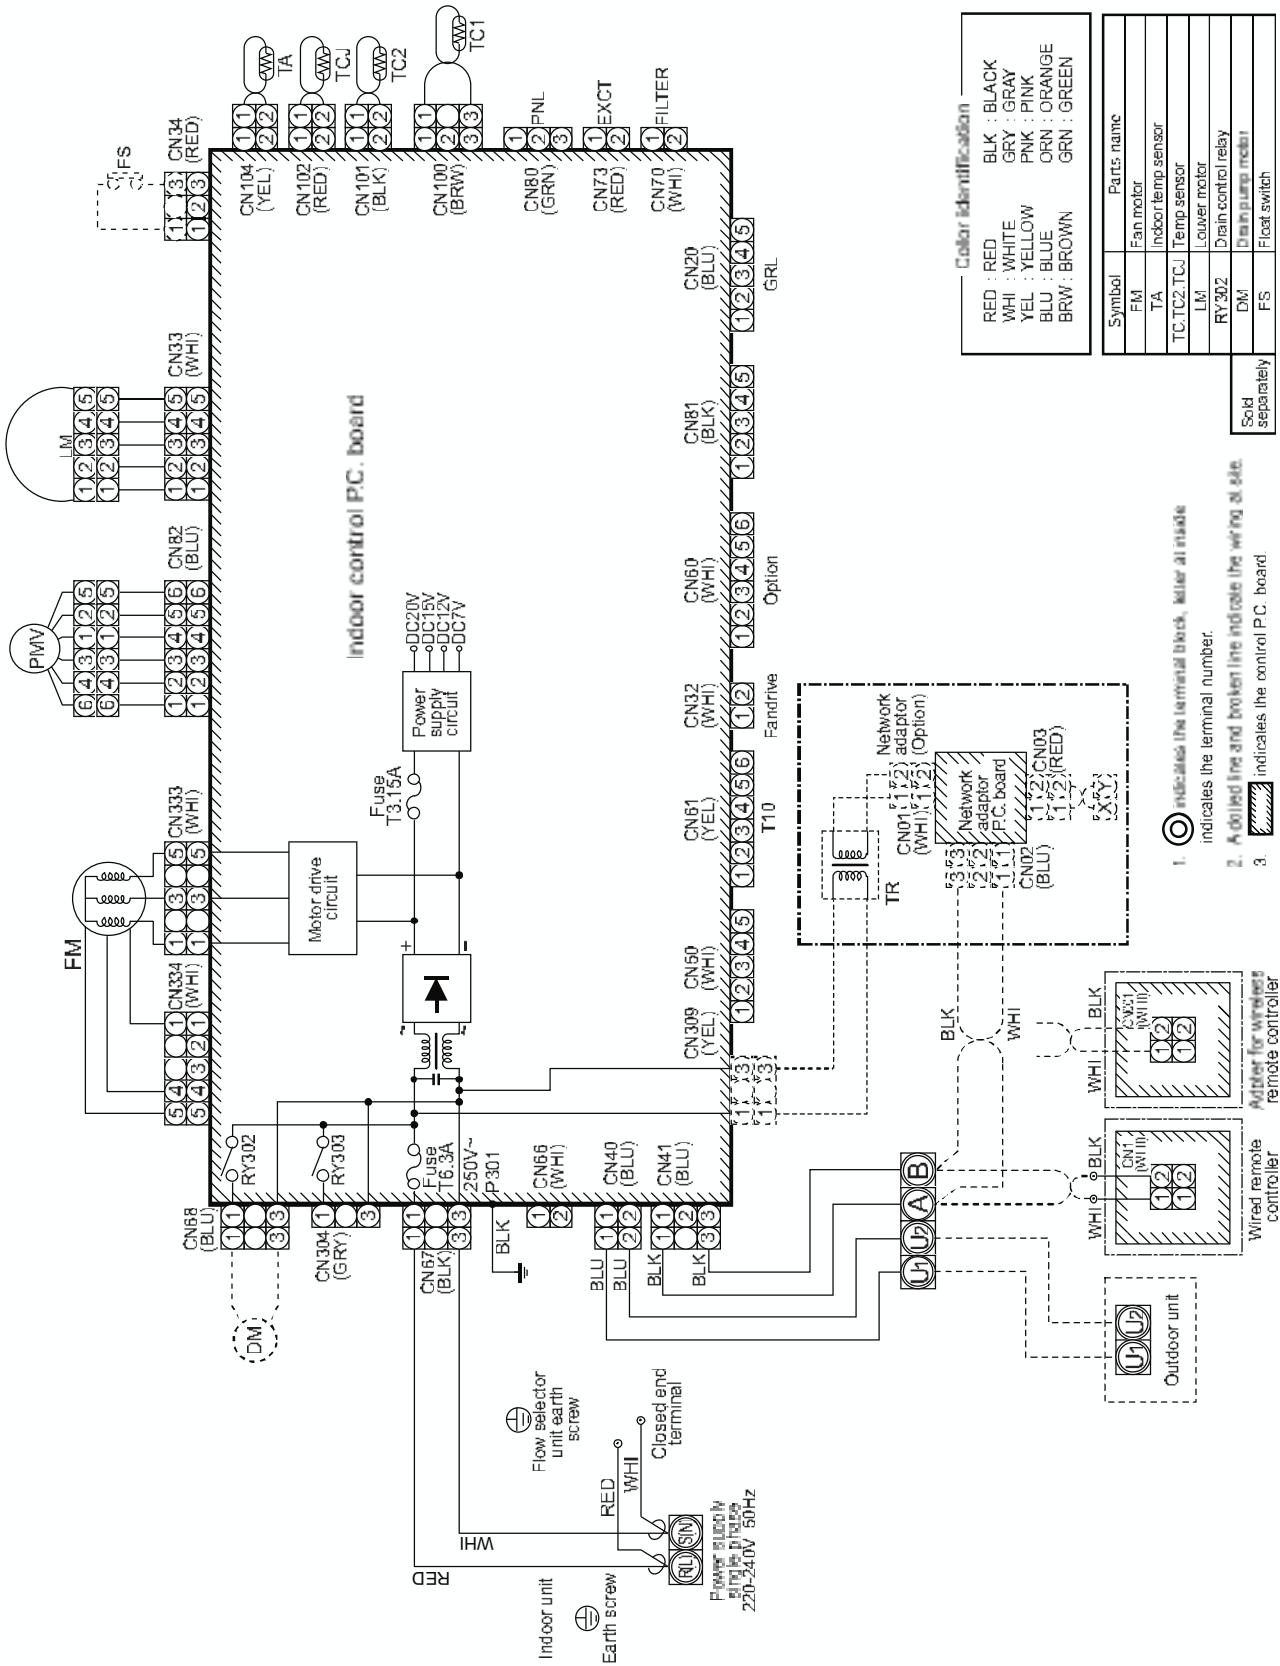



4. Center of gravity

Model name	X (mm)	Y (mm)	Z (mm)	Total weight(kg)
MMC-AP0151H	320	460	90	22
MMC-AP0181H				
MMC-AP0241H	320	570	90	26
MMC-AP0271H				
MMC-AP0361H	320	770	90	34
MMC-AP0481H				

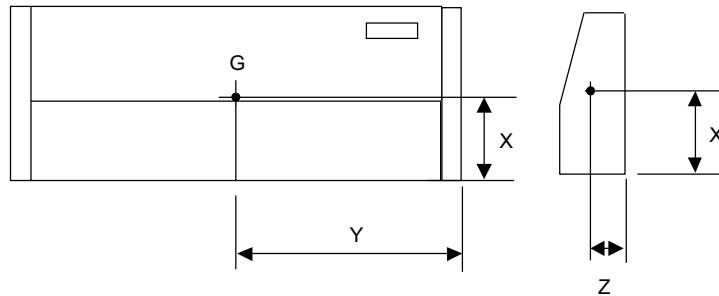

5. Electrical current characteristics

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
Ceiling Type	MMC-AP 0151 H	230-1-50	198	264	0.030	0.33	0.41	15
	MMC-AP 0181 H	230-1-50	198	264	0.030	0.37	0.46	15
	MMC-AP 0241 H	230-1-50	198	264	0.040	0.48	0.60	15
	MMC-AP 0271 H	230-1-50	198	264	0.040	0.48	0.60	15
	MMC-AP 0361 H	230-1-50	198	264	0.080	0.90	1.13	15
	MMC-AP 0481 H	230-1-50	198	264	0.080	0.96	1.20	15

MCA : Minimum Circuit Amps

FLA : Full Load Amps

MOCP : Maximum Overcurrent Protection (Amps)

kW : Fan Motor Rated Output (kW)






Ceiling Type (MMC-AP*1H)**

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
036	10.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	12.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	14.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	16.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	18.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	20.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	21.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	23.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	25.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	27.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	29.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	31.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	33.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	35.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	37.0	8.9	6.5	9.8	6.9	10.5	7.4	10.8	7.4	11.2	7.4	11.8	7.3	12.4	7.1
	39.0	8.7	6.3	9.6	6.8	10.2	7.2	10.5	7.2	10.9	7.2	11.5	7.1	12.0	6.9
048	10.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	12.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	14.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	16.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	18.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	20.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	21.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	23.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	25.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	27.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	29.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	31.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	33.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	35.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	37.0	11.1	8.4	12.3	9.0	13.1	9.5	13.6	9.5	14.0	9.5	14.8	9.4	15.4	9.2
	39.0	10.8	8.2	12.0	8.7	12.8	9.2	13.2	9.2	13.6	9.2	14.4	9.1	15.0	8.9



7. Air throw distance chart

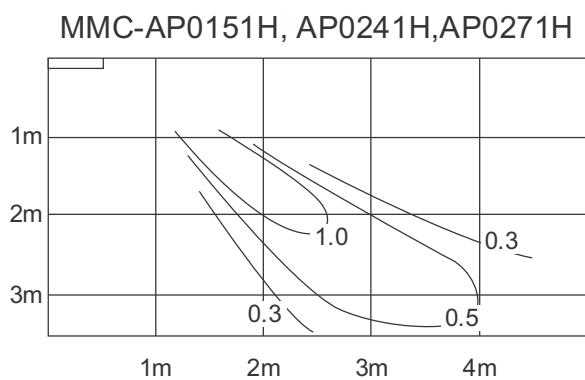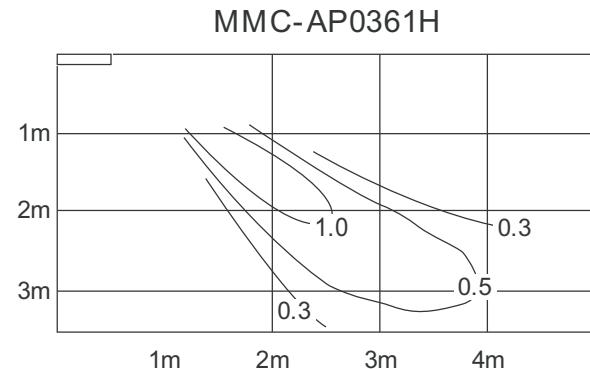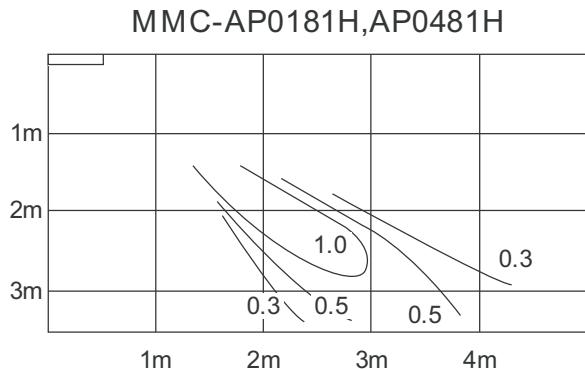


unit : [m/s]




8. Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resound room.

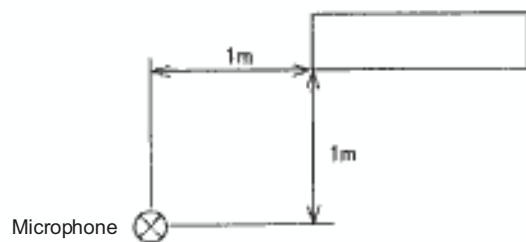


MMC-AP0151H

Fan Tap	H	M	L
Sound pressure level(dB(A))	35	32	30

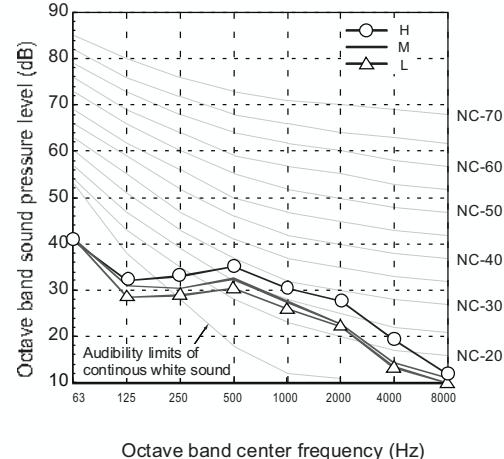


MMC-AP0181H

Fan Tap	H	M	L
Sound pressure level(dB(A))	36	33	30

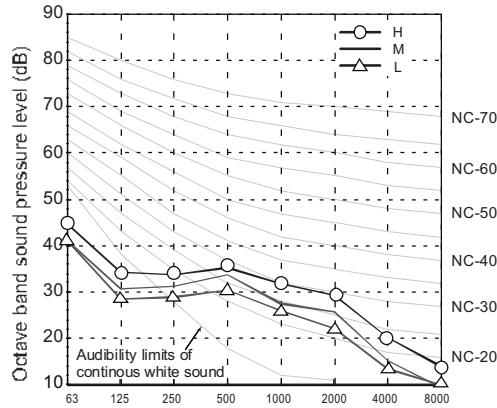


MMC-AP0241H,AP0271H

Fan Tap	H	M	L
Sound pressure level(dB(A))	38	36	33

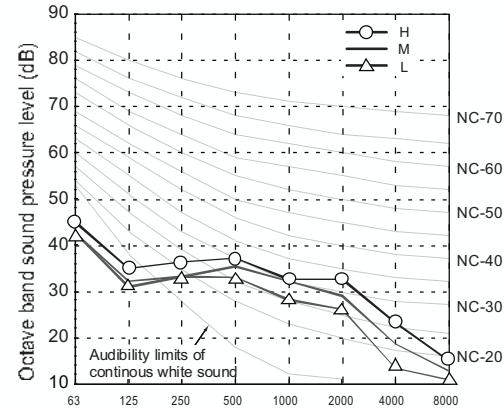


MMC-AP0361H

Fan Tap	H	M	L
Sound pressure level(dB(A))	41	38	35

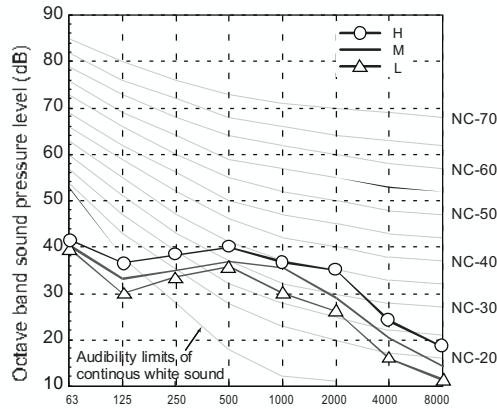

MMC-AP0481H

Fan Tap	H	M	L
Sound pressure level(dB(A))	43	40	37

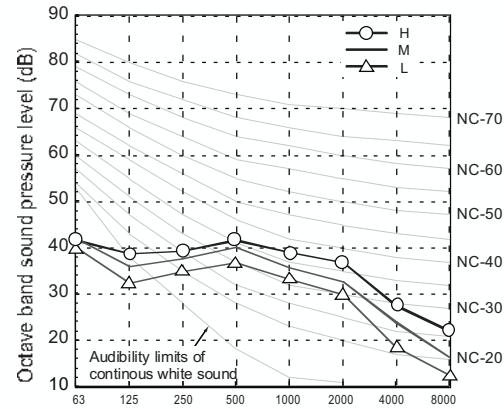



9. Accessories

Parts name	Model name	Applied model	Note	Remarks
Drain pump kit	TCB-DP22CE2	MMC-AP0151/0181H MMC-AP0241 to 0481H	Stand-up 600 or less (from bottom face of ceiling)	Use with TCB-KP12CE2 Use with TCB-KP22CE2
	TCB-KP12CE2 TCB-KP22CE2	MMC-AP0151/0181H	Needed when drain pump kit is used	

