



11-2-12. Floor Standing Type

# Floor Standing Type

MMF-AP0154H-E / MMF-AP0184H-E  
MMF-AP0244H-E / MMF-AP0274H-E  
MMF-AP0364H-E / MMF-AP0484H-E  
MMF-AP0564H-E



## Contents

1. Specifications
2. Dimension
3. Wiring diagram
4. Center of Gravity
5. Electrical characteristics
6. Sensible capacity table
7. AIR throw distance chart
8. Sound characteristics (NC-Curve)



## 1. Specifications

### Floor Standing Type

Model name		MMF-	AP0154H-E	AP0184H-E	AP0244H-E	AP0274H-E	AP0364H-E	AP0484H-E	AP0564H-E
Cooling/Heating capacity (Note 1)		(kW)	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply	1 phase 50Hz 230V (220 – 240V) ( Separate power supply for indoor units is required.)							
	Running current	(A)	0.67		0.88		1.29		1.60
	Power consumption	(kW)	0.150		0.190		0.280		0.350
	Power factor	(%)	97		94		95		95
	Starting current	(A)	0.90		1.10		1.70		2.10
Appearance		Silky shade (1Y 8.5/0.5)							
Outer dimension	Height x Width x Depth	(mm)	1750 x 600 x 210				1750 x 600 x 390		
Total weight		(kg)	48		49		65		
Heat exchanger		Finned tube							
Soundproof/Heat-insulating material		Non-flammable insulation							
Fan unit	Fan	Centrifugal fan							
	Standard air flow (High/Mid./Low)	(m <sup>3</sup> /h)	900/780/660		1,200/1,020/840		1,920/1,680/1,380		2,160/1,860/1,560
	Motor output	(W)	37		63		110		160
Air filter		Standard filter (Simple filter)							
Controller		Remote controller							
Connecting pipe	Gas side	(mm)	∅ 12.7		∅ 15.9				
	Liquid side	(mm)	∅ 6.4		∅ 9.5				
	Drain port (Nominal dia. mm)	20 (One side of male screw)							
Sound pressure level(Note 2)(High/Mid./Low)		(dB(A))	46/43/38		49/45/40		51/48/44		54/50/46



**Note 1** : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

**Note 2** : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.


**Note** : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB  
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

## 2. Dimension

MMF-AP0154H-E, AP0184H-E, AP0244H-E, AP0274H-E, AP0364H-E, AP0484H-E, AP0564H-E

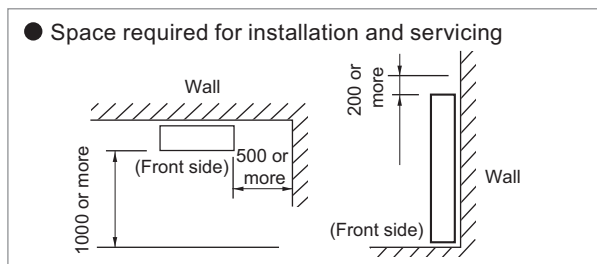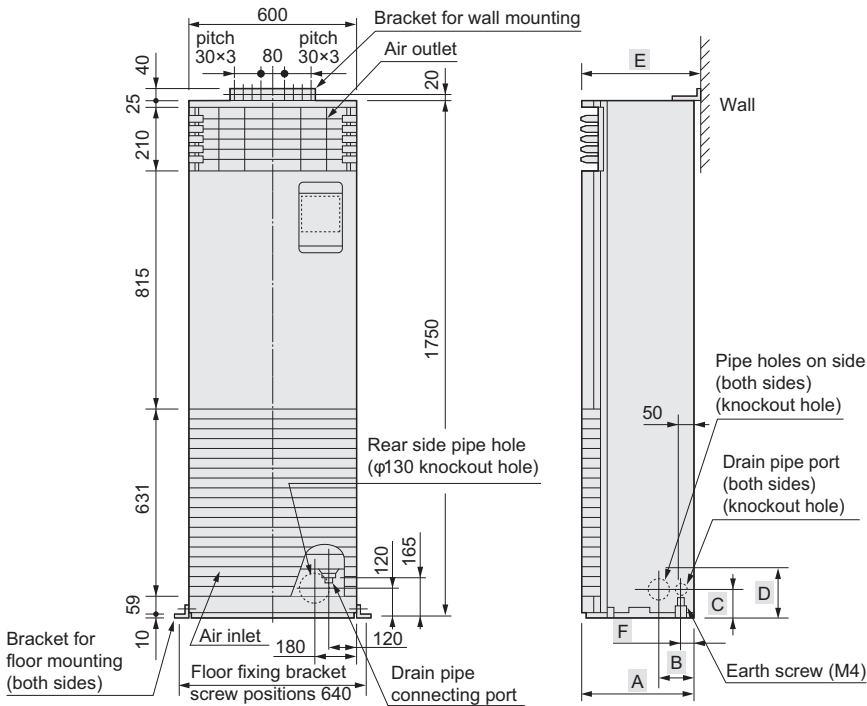

Model	MMD-	A	B	C	D	E	F
AP0154H-E to AP0274H-E		200	107	132	157	210	50
AP0364H-E to AP0564H-E		380	125	120	160	390	40

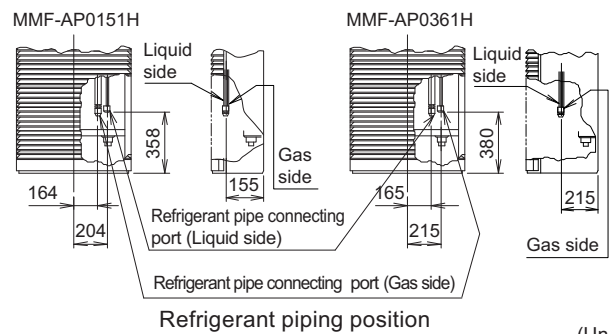


(Unit: mm)



## 3. Wiring diagram

MMF-AP0154H-E, AP0184H-E, AP0244H-E, AP0274H-E, AP0364H-E, AP0484H-E, AP0564H-E

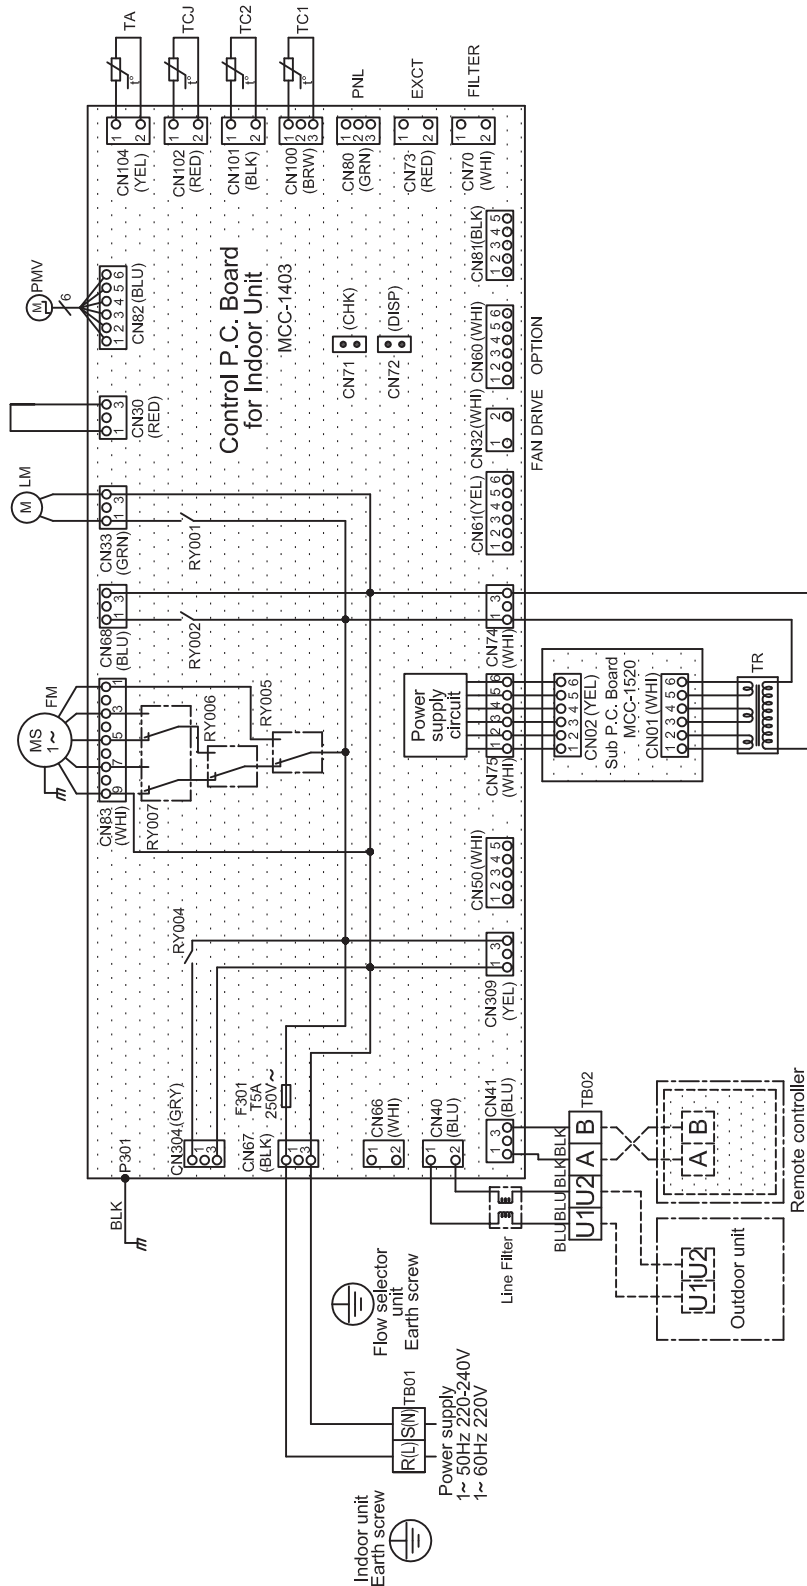

1. Broken line indicate the wiring at site.
- Long dashed short dashed line indicate the accessories.
2. indicates the terminal block.
- indicates the connection terminal.
3. indicates the protection ground.
4. indicates the control P.C. board.

COLOR IDENTIFICATION


RED	: RED
WHI	: WHITE
YEL	: YELLOW
BLU	: BLUE
BLK	: BLACK
GRY	: GRAY
PNK	: PINK
ORN	: ORANGE
BRW	: BROWN
GRN	: GREEN

Symbol	Parts Name
CN**	Connector
LM	Louver Motor
F301	Fuse
FM	Fan Motor
PMV	Pulse Motor Valve
RC	Running Capacitor
RY001	Louver Control Relay
RY005,006,007	Fan Motor Control Relay
TA	Indoor temp sensor
TB01,02,03	Terminal Block
TC1,TC2,TCJ	Temp sensor
TR	Transformer



#### 4. Center of Gravity

Model name	X(mm)	Y(mm)	Z(mm)	Total weight(kg)
MMF-AP0154H-E MMF-AP0184H-E	90	290	880	48
MMF-AP0244H-E MMF-AP0274H-E				49
MMF-AP0364H-E MMF-AP0484H-E MMF-AP0564H-E	120	295		65

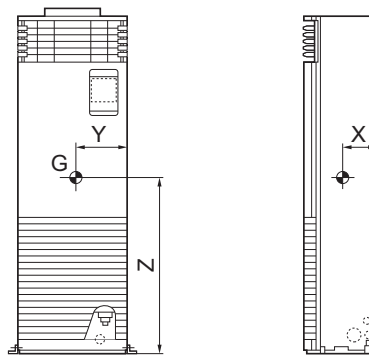



## 5. Electrical characteristics

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
Floor Standing Type	MMF-AP0154H-E	230-1-50	198	264	0.037	0.77	0.96	15
	MMF-AP0184H-E	230-1-50	198	264	0.037	0.77	0.96	15
	MMF-AP0244H-E	230-1-50	198	264	0.063	1.01	1.27	15
	MMF-AP0274H-E	230-1-50	198	264	0.063	1.01	1.27	15
	MMF-AP0364H-E	230-1-50	198	264	0.110	1.48	1.85	15
	MMF-AP0484H-E	230-1-50	198	264	0.160	1.84	2.30	15
	MMF-AP0564H-E	230-1-50	198	264	0.160	1.84	2.30	15

MCA : Minimum Circuit Amps

FLA : Full Load Amps

MOCP : Maximum Overcurrent Protection (Amps)



6. Sensible capacity table

**Floor Standing Type ( MMF-AP\*\*\*4H-E )**

TC : Total capacity [kW]    SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	12.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	14.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	16.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	18.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	20.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	21.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	23.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	25.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	27.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	29.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	31.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	33.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	35.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
37.0	3.6	2.9	4.0	3.1	4.2	3.3	4.4	3.3	4.5	3.3	4.7	3.3	5.0	3.2	
39.0	3.5	2.8	3.8	3.0	4.1	3.2	4.2	3.2	4.4	3.2	4.6	3.2	4.8	3.1	
018	10.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	12.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	14.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	16.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	18.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	20.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	21.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	23.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	25.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	27.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	29.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	31.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	33.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	35.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
37.0	4.5	3.5	4.9	3.7	5.3	4.0	5.4	4.0	5.6	4.0	5.9	3.9	6.2	3.8	
39.0	4.3	3.4	4.8	3.6	5.1	3.9	5.3	3.9	5.4	3.9	5.7	3.8	6.0	3.7	
024	10.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	12.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	14.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	16.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	18.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	20.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	21.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	23.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	25.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	27.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	29.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	31.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	33.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	35.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
37.0	5.6	4.5	6.2	4.8	6.7	5.1	6.9	5.1	7.1	5.1	7.5	5.1	7.8	5.0	
39.0	5.5	4.4	6.1	4.7	6.5	5.0	6.7	5.0	6.9	5.0	7.3	4.9	7.6	4.8	
027	10.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	12.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	14.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	16.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	18.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	20.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	21.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	23.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	25.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	27.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	29.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	31.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	33.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	35.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
37.0	6.4	5.1	7.0	5.4	7.5	5.7	7.7	5.7	8.0	5.7	8.4	5.7	8.8	5.5	
39.0	6.2	4.9	6.8	5.2	7.3	5.6	7.5	5.6	7.8	5.6	8.2	5.5	8.6	5.4	



## Floor Standing Type ( MMF-AP\*\*\*4H-E )





TC : Total capacity [kW]    SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	12.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	14.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	16.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	18.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	20.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	21.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	23.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	25.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	27.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	29.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	31.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	33.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	35.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
37.0	8.9	6.9	9.8	7.3	10.5	7.8	10.8	7.7	11.2	7.7	11.8	7.7	12.4	7.5	
39.0	8.7	6.7	9.6	7.1	10.2	7.6	10.5	7.5	10.9	7.5	11.5	7.5	12.0	7.3	
048	10.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	12.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	14.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	16.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	18.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	20.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	21.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	23.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	25.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	27.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	29.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	31.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	33.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	35.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
37.0	11.1	8.5	12.3	9.0	13.1	9.6	13.6	9.6	14.0	9.6	14.8	9.5	15.4	9.3	
39.0	10.8	8.3	12.0	8.8	12.8	9.3	13.2	9.3	13.6	9.3	14.4	9.2	15.0	9.0	
056	10.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	12.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	14.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	16.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	18.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	20.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	21.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	23.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	25.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	27.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	29.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	31.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	33.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	35.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
37.0	12.7	9.8	14.1	10.4	15.0	11.1	15.5	11.0	16.0	11.0	16.9	10.9	17.7	10.7	
39.0	12.4	9.5	13.7	10.1	14.6	10.8	15.1	10.7	15.5	10.7	16.4	10.6	17.2	10.4	






7. Air throw distance chart

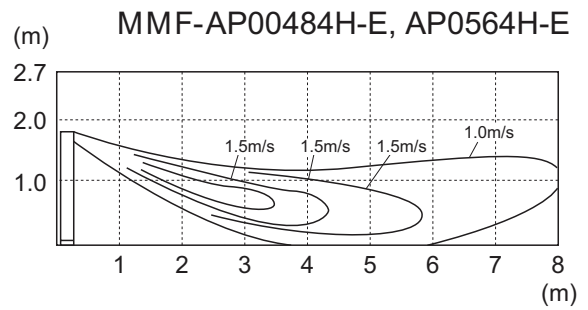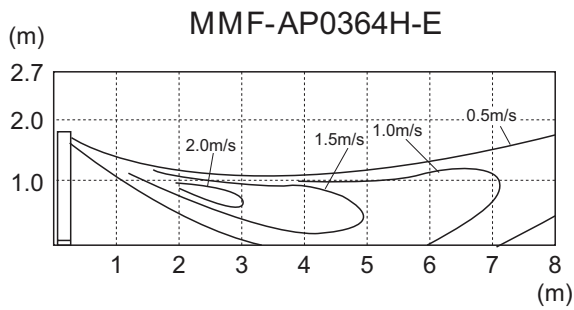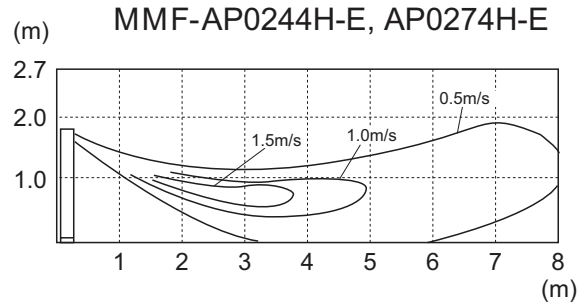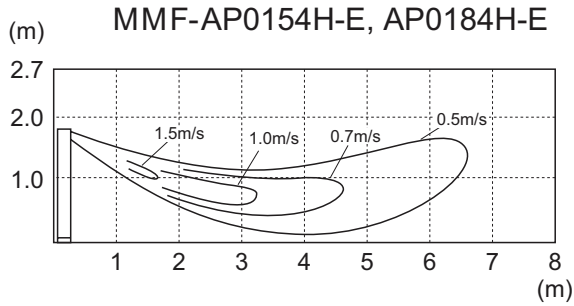


## 8. Sound characteristics (NC Curve)

Measuring location




**MMF-AP0154H-E, AP0184H-E**

Fan tap	H	M	L
Sound pressure level (dB(A))	46	43	38

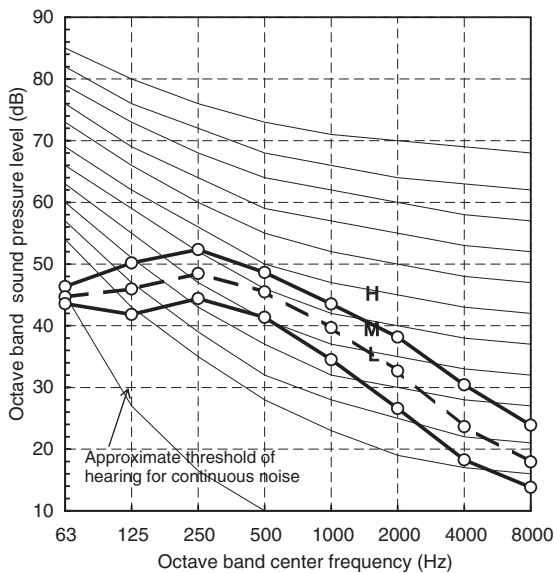


**MMF-AP0244H-E, AP0274H-E**

Fan tap	H	M	L
Sound pressure level (dB(A))	49	45	40

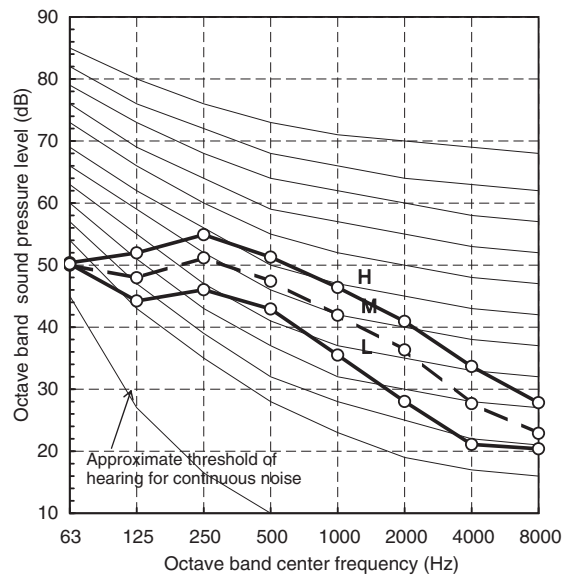

**MML-AP0364H-E**

Fan tap	H	M	L
Sound pressure level (dB(A))	51	48	44

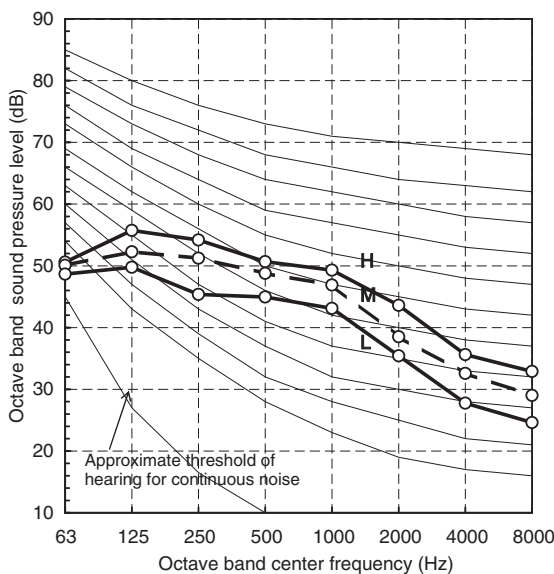

**MML-AP0484H-E, AP0564H-E**

Fan tap	H	M	L
Sound pressure level (dB(A))	54	50	46

