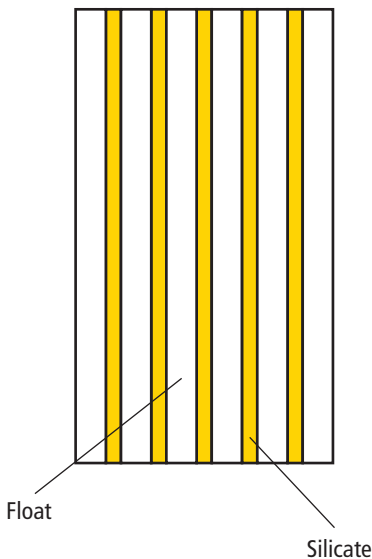






Product composition	Characteristics 14
 Float Silicate	▶ Cuttable with specialist equipment ▶ Internal installation only ▶ Double side fire resistance ▶ Excellent impact rating
Technical characteristics	Physical features
▶ Fire classification: EI60 ▶ Impact classification: 1B1 ▶ Light transmission: 82% ▶ Sound reduction: 40 dB ▶ U value: ▶ UV stability:	▶ Nominal Thickness: 23 mm ▶ Thickness tolerances: ▶ Dimensional tolerances: ▶ Weight/m²: 57.6 kg ▶ Temperature range: ▶ Stock sheet size: 3100 x 2125 mm ▶ Min manufactured size:
Possible applications	
Steel system   Timber system   30/30 only	F L E X I B L E I N D E P E N D E N T R E S P O N S I V E S P E C I F I C T E C H N I C A L FIRST IN FIRE GLASS

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.