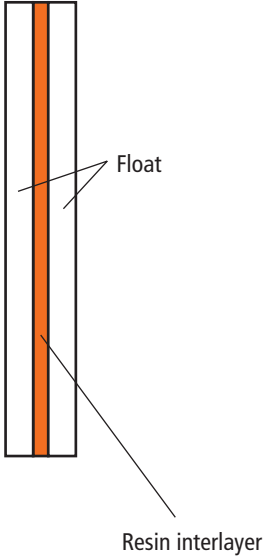

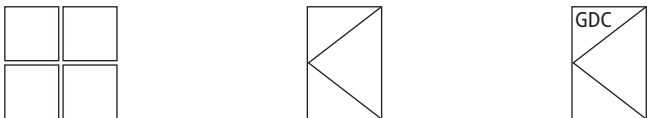


Product composition	Characteristics	1
	<ul style="list-style-type: none"> ▶ Pyroguard EW30 Impact is cuttable with standard equipment ▶ Available in stock sheets 1580 x 2780 mm ▶ Installation interior and exterior (UV stable) ▶ Double sided fire resistance 	
Technical characteristics	Physical features	
<ul style="list-style-type: none"> ▶ Fire classification: EW30 ▶ Impact classification: 2B2 ▶ Light transmission: 87% ▶ Sound reduction: 33 dB ▶ U value: 5.1 W/m² K ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: 7 mm ▶ Thickness tolerances: - 0.6 / + 0.8 mm ▶ Weight/m²: 17 kg ▶ Temperature range: - 20 / + 140 °C ▶ Min manufactured size: 	
	Possible applications	
<p style="text-align: center; font-weight: bold; letter-spacing: 0.5em;">F L E X I B L E I N D E P E N D E N T R E S P O N S I V E S P E C I F I C T E C H N I C FIRST IN FIRE GLASS</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;"> <p>Steel system</p>  </div> </div> <div style="display: flex; justify-content: space-around; width: 100%; margin-top: 20px;"> <div style="text-align: center;"> <p>Timber system</p>  </div> </div> <div style="display: flex; justify-content: space-around; width: 100%; margin-top: 10px;"> <div style="text-align: center;"> <p>Please see PV 12-A-422, page 90</p> </div> <div style="text-align: center;"> <p>Please see PV 12-A-423, page 91 & 92</p> </div> <div style="text-align: center;"> <p>CF 257 p 18</p> </div> </div> </div>	
28	06/2015	

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.